

UTILITY SIZE REFUSE COMPACTION BODY

FASTPACK

HIGH COMPACTION RATIO FOR MAXIMUM PAYLOAD



THE PACKER WITH PUNCH!

DATA-VEYORS CORP.
Oakland, California

FASTPACK

3 SIZES — ONE

IMPROVE YOUR PROFIT PICTURE

- LOW INITIAL INVESTMENT
- REDUCE OPERATING COSTS
- ONE-MAN OPERATION



ECONOMICAL

- SCATTER ROUTES
- RESIDENTIAL AREAS
- SPECIAL PICKUPS
- PARK AND BEACHES
- STREET DEPARTMENTS

EASY TO LOAD

- TOP DOORS IN LINE WITH SIDE DOORS
- LOAD FROM EITHER SIDE
- FOLD DOWN STEPS
- BARREL LIFT OPTIONAL



EASY TO MOUNT

FASTPACK

HIGH QUALITY

SAFE


OPEN REAR DOOR FROM SIDE ●

COMPLETE EJECTION ●

UNLOAD ON ANY TERRAIN ●

NO ACCIDENTAL OPENING OF REAR DOOR ●

SAFETY OVERLOAD LOCKS ●

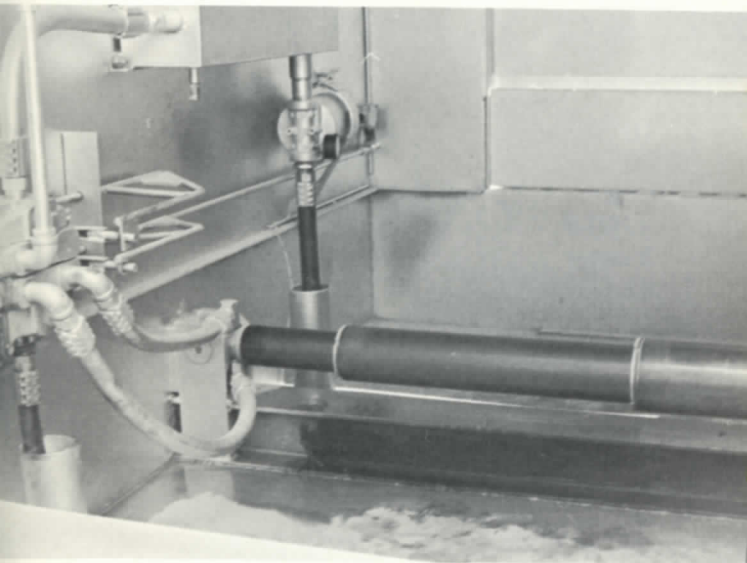

EFFICIENT

- 3-STAGE TELESCOPIC CYLINDER
- 43,000 LB. PACKING FORCE
- NO INEFFICIENT SCISSOR ACTION
- NO HYDRAULIC CYLINDER IN CAB
- NO CHASSIS MODIFICATION REQUIRED

MANEUVERABLE

LOW OR NARROW CLEARANCES ●

SHORT TURNING RADIUS ●

NO OVERWEIGHT WORRIES ●



OUTLASTS THE CHASSIS

FASTPACK

BODY CONSTRUCTION: High tensile plate and sheet steel heavily re-inforced with structural steel. Heavy cast steel rear door hinges.

HYDRAULICS: Cylinders: Extra heavy duty to provide years of low maintenance operation.
P. T. O. – Chelsea
Pump – Commercial Shearing


CONTROLS: 2 or 3 Spool valve control. Packing Blade can be operated from either side.

STEPS: Rugged fold down steps on both sides for easy loading and personnel safety.

LIGHTS: Identification and Clearance lights meet Federal Safety Standards.

PAINT: Standard color – White. Top grade automotive.

OPTIONAL EQUIPMENT: Barrel Lift – Push Button Controls – Automatic Packing Cycle
Side Door Safety Interlocks.

3 SIZES 	7½ CU. YD.	10 CU. YD.	13 CU. YD.
BODY SPECIFICATIONS			
Overall Length (incl. Bubble)	10' 4"	10' 7"	11' 7"
Overall Width	90"	90"	90"
Height above Chassis Frame	5' 3"	5' 9"	5' 9"
Weight	3450 #	3750 #	4050 #
Packing Blade Cylinder	3-stage	3-stage	3-stage
Packing Blade Force	43,000 #	43,000 #	43,000 #
Packing Cylinder Stroke	62-1/8"	62-1/8"	74-1/8"
Oil Operating Pressure	1800 #	1800 #	1800 #
Oil Tank Capacity – gallons	15	15	15
Rear Door Cylinders (inset on side)	2	2	2
Cast Aluminum Guide Blocks	4	4	4
Guide Block Wear Shoes (adjustable)	8	8	8
Loading Door Width	36"	36"	36"
Top Doors (in line w/side doors)	36" x 21"	36" x 21"	36" x 21"
RECOMMENDED CHASSIS			
Rated by Tonnage	1 ton	1½ ton	1½ ton
Cab to Axle	60"	60"	72"
Wheelbase	126" to 132"	126" to 132"	135" to 144"
G. V. W. Rating	10,000 #	14,000 #	15,000 #
Rear Axle	11,000 #	11,000 #	11,000 #
Rear Axle Ratio	5.7 – 6.2	5.7 – 6.2	5.7 – 6.2
Rear Springs @ Ground	4150 #	8750 #	8750 #
Front Springs @ Ground	1750 #	2600 #	2600 #
Brakes			
Front	H. D.	14 x 2½	14 x 2½
Rear	H. D.	15 x 4	15 x 4
Dual Rear Wheels	Yes	Yes	Yes
Tires	8 PR	7.50 x 20 8 PR	7.50 x 20 8 PR

Manufactured by
DATA-VEYORS CORPORATION
3246 Ettie Street
Oakland, California 94608
(415) 658-3569

For Sales & Service:

ClassicRefuseTrucks.com Library

Form #505 PRCo. 5M-9/69