

DEMPSTER

Driving into the Future

DINOSAUR™




All-hydraulic Roll-off Container System

- All-hydraulic roll-off container system designed and built for low maintenance operation
- Most reliable, large capacity system available
- One man can easily load and dump up to 25 tons of construction debris, scrap or compacted refuse without leaving his cab

supported by Dempster Parts Express

P.O. Box 1388, Highway 123 North, Toccoa, GA 30577 Ph 706.886.2327 Fx 706.886.4318 www.DempsterEquip.com sales@dempsterequip.com

DEMPSTER DINOSAUR™

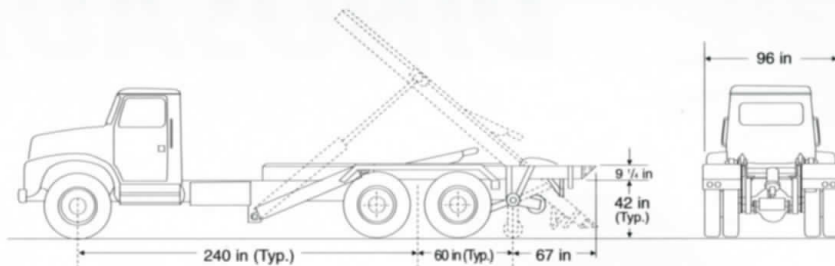

CONVENTIONAL CAB

Gross Load	50,000 Lbs <small>DSS0 only</small>		40,000 Lbs		35,000 Lbs		30,000 Lbs	
	Front	Rear	Front	Rear	Front	Rear	Front	Rear
Unit and Container Length								
19 ft	10,000	63,500	8,800	52,200	8,500	47,500	8,200	42,800
20.5 ft	11,700	61,800	10,200	50,800	9,800	46,200	9,300	41,700
22 ft	13,300	60,200	11,400	49,600	10,800	45,200	10,200	40,800

DSS0 load ratios based on chassis weight of 15,000 lbs; 6500 front, 8500 rear—DS40 14,000 lbs; 6500 front, 7500 rear

CAB OVER

Gross Load	50,000 Lbs <small>DSS0 only</small>		40,000 Lbs		35,000 Lbs		30,000 Lbs	
	Front	Rear	Front	Rear	Front	Rear	Front	Rear
Unit and Container Length								
19 ft	11,200	62,800	9,900	51,600	9,500	47,000	9,200	42,300
20.5 ft	13,200	60,800	11,500	50,000	11,000	45,500	10,400	41,100
22 ft	14,900	59,100	12,800	48,700	12,100	44,400	11,400	40,100

DSS0 load ratios based on chassis weight of 15,000 lbs; 7000 front, 8000 rear—DS40 14,000 lbs; 6500 front, 7500 rear

CONDENSED SPECIFICATIONS

SPECIFICATIONS		HYDRAULIC EQUIPMENT					FIELD MOUNTING	
Dinosaur Model	Gross Capacity	Tilting Frame	Bail Cylinder	Jack Cylinder	Gear Type Pump	Oil Reservoir	Shipping Weight	Export Cube in cu.ft
DS40	40,000	Two-5 in	One-6 in	One-5 in	36 GPM	65 gals	8,500	288
DSS0	50,000	Two-6 in	One-7 in	One-5 in	36 GPM	65 gals	9,500	288

Sold and Serviced by:



DEMPSTER EQUIPMENT COMPANY,
P.O. Box 1388, Highway 123 North, Toccoa, GA 30577
TOLL-FREE 1-888-DEMPSTER/(706) 866-2327/Fx: (706) 886-4318

All designs, specifications and components are subject to change at the manufacturer's sole discretion at any time without notice. Data published herein is informational in nature and shall not be construed to warrant suitability of the unit for any particular purpose, as performance may vary with the conditions encountered.