


# E-Z Pack<sup>®</sup>

## Models SL-16 SL-20 SL-24 SIDE LOADER

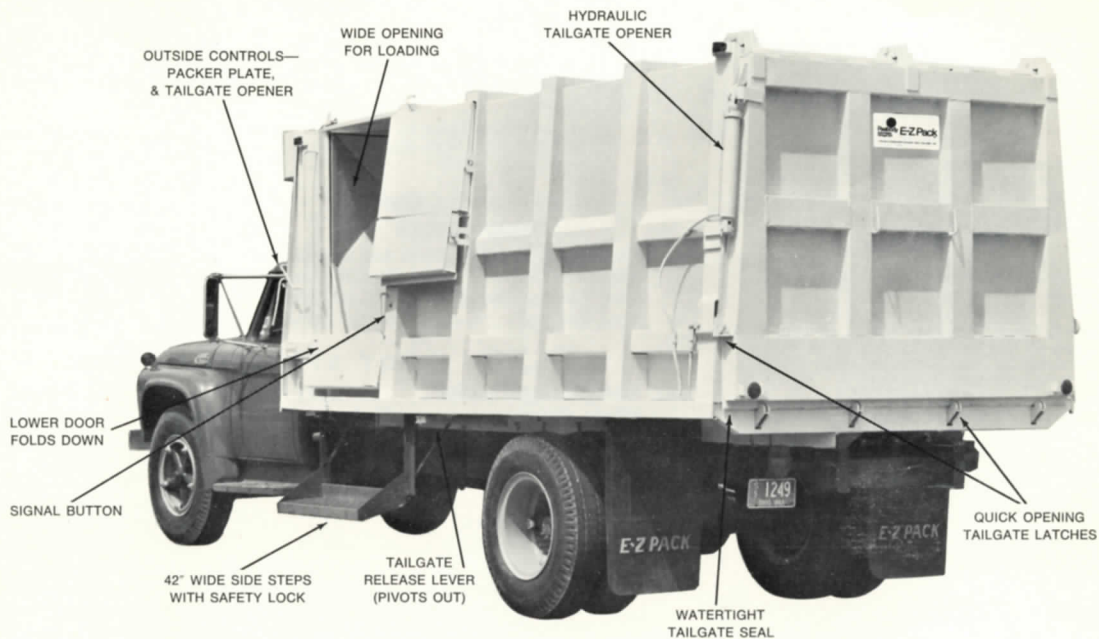


## Economical . . . Efficient . . . Sanitary . . . Practical!

The E-Z Pack SL smashes refuse removal costs! Actual crushing compaction provides greater payloads . . . eliminates special routing due to bulky materials — for less man hours per tons hauled! No other special equipment is needed to cover the route . . . hauls all types of refuse in one load! Famous E-Z Pack Body features fewer working parts to reduce maintenance costs . . . watertight body provides a cleaner, more healthful city!



### Telescopic Cylinder

Same double-acting cylinder that packs the load, unloads it — is of large diameter to provide greater compaction force . . . pressure against the load increases as the load increases for thorough packing. Total force — 76,600 pounds.

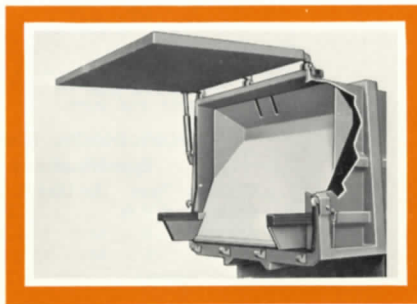

### Specially Designed Plate

Scientific design of packer plate forces load from bottom to top with equal pressure . . . plate ejects load completely, extends beyond end of body — permitting last of load to fall clear . . . Powered tailgate raises high, does not interfere with unloading.



### Sanitary Body

Body is watertight. Special one-piece double channel gasket prevents leakage . . . heavily reinforced rear door is one piece — will not deflect or gap during packing cycle. Single lever operates all six endgate latches. Body liquid is easily removed by opening sump drain on each side.

**Peabody** Solid Wastes Management

*The Authority on Refuse Handling Equipment Systems*

# SPECIFICATIONS

## STANDARD EQUIPMENT

### Hydraulic System

- Multi-stage telescopic D. A. hydraulic cylinder
- Two spool valve
- Continuous-duty roller bearing pump

### Drive Mechanism

- Drive shaft, 1 1/4 in. with 2 H. D. universal joints

### Controls

- Outside controls (L. & R.) for packer plate and tailgate opener w/automatic throttle control

### Doors

- 2 sliding top loading doors
- 2 upper side loading doors, hinge to rear, locks
- 2 center side loading doors, hinge to rear, locks
- 2 lower side loading doors, swing down
- One-piece top-hinged tailgate
- Spring-loaded latches on all side doors
- Quick-opening clamps on tailgate
- Special one-piece rubber seal on tailgate

### Body

- Floor sheets, tailgate, packer face — Hi-Ten steel
- Upper side sheets 12 ga. Hi-Tensile steel
- Lower side sheets 3/16 in. Hi-Tensile steel
- Heavy box frame, reinforced
- Watertight to 14 in. above floor line

### Sump

- Forward-mounted sump (16 gal.)
- Two lever-operated sump drains
- Lower portion of body watertight, approx. cap. 830-1150 gal., (subject to body length)

### Sills

- Tapered longitudinals, for drainage forward to sump

### Steps

- Fold-down steps w/"Grip-Strut" treads — both sides below loading doors — safety lock in travel position

### Lights and Mud Flaps

- ICC lights, reflectors

### Signals

- 2 push buttons at loading doors, 1 each side, signals driver with truck horn

### Tailgate Opener

- Incorporated into main hydraulic system

### Paint

- Prime and white enamel finish coat

## OPTIONAL EQUIPMENT

### Power Take Off

- Cab mounted cable control

### Rear Steps

- 2 rear steps on tailgate, height adjusts, locks for travel, grab bars included

### Automatic Cycling

#### Lights

- Turn signals

#### Paint

- Any color comb. or special painting quoted

#### Mounting

- Factory mounting available

#### Auxiliary Engine

## SL16 BODY SPECIFICATIONS


Body Length Inside	.....14 Ft.
*Body Capacity	.....16 3/4 Cu. Yds.
Overall Length (A)	.....181 In.
Inside Width	.....80 1/4 In.
Inside Height	.....66 In.
Overall Width	.....95 1/2 In.
Overall Height (B)	.....81 In.
Door Opening (C)	.....36 In.
Oil Capacity	.....40 Gal.

- \*Packer Plate Face to tailgate
- \*\*Add 492 Lbs. with oil, P.T.O., parts and pump

### Recommended Chassis Specifications

Chassis Type	..All Makes and Models
Approx. G.V.W.	.....21,000 Lbs.
App. Cab-to-Axle (C/A)	..Min. 102 In.
Rear Springs	.....Heavy Duty

Body Liquid Capacity	.....830 Gal.
**Approx. Body Weight	.....7108 Lbs.
Cylinder Model	.....84113-DA
Cylinder Stages	.....8-7-6-5 In.
Total Stroke	.....113 In.
Packing Cylinder Diameter	8 1/2 In.
Loading Height Above Frame	23 In.
Tot. Compaction Force	76,600 Lbs.

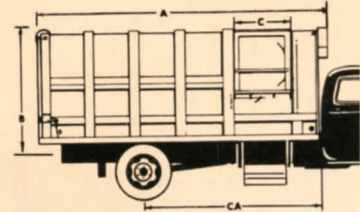

## SL20 BODY SPECIFICATIONS


Body Length Inside	.....16 Ft.
*Body Capacity	.....26 Cu. Yds.
Overall Length (A)	.....201 In.
Inside Width	.....80 1/4 In.
Inside Height	.....66 In.
Overall Width	.....95 1/2 In.
Overall Height (B)	.....81 In.
Door Opening (C)	.....36 In.
Oil Capacity	.....40 Gal.

- \*Packer Plate Face to tailgate
- \*\*Add 492 Lbs. with oil, P.T.O., parts and pump

### Recommended Chassis Specifications

Chassis Type	..All Makes and Models
Approx. G.V.W.	.....24,000 Lbs.
App. Cab-to-Axle (C/A)	..Min. 120 In.
Rear Springs	.....Heavy Duty

Body Liquid Capacity	.....946 Gal.
**Approx. Body Weight	.....7808 Lbs.
Cylinder Model	.....85136-DA
Cylinder Stages	.....8-7-6-5-4 In.
Total Stroke	.....136 In.
Packing Cylinder Diameter	8 1/2 In.
Loading Height Above Frame	23 In.
Tot. Compaction Force	76,600 Lbs.

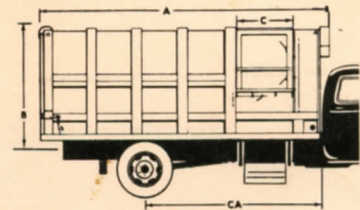

## SL24 BODY SPECIFICATIONS


Body Length Inside	.....18 Ft., 10 In.
*Body Capacity	.....24 Cu. Yds.
Overall Length (A)	.....239 In.
Inside Width	.....80 1/4 In.
Inside Height	.....66 In.
Overall Width	.....95 1/2 In.
Overall Height (B)	.....81 In.
Door Opening (C)	.....48 In.
Oil Capacity	.....40 Gal.

- \*Packer Plate Face to tailgate
- \*\*Add 492 Lbs. with oil, P.T.O., parts and pump

### Recommended Chassis Specifications


Chassis Type	..All Makes and Models
Approx. G.V.W.	.....26,000 Lbs.
Approx. C/A = Min.	148 in.;
C/T = Min.	134 in.
Rear Springs	.....Heavy Duty

Body Liquid Capacity	.....1150 Gal.
**Approx. Body Weight	.....8758 Lbs.
Cylinder Model	.....86168-DA
Cylinder Stages	.....8-7-6-5-4-3 In.
Total Stroke	.....168 In.
Packing Cylinder Diameter	8 1/2 In.
Loading Height Above Frame	23 In.
Tot. Compaction Force	76,600 Lbs.

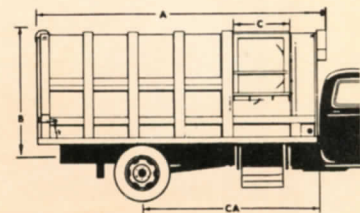

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

© 1972 Peabody Galion Corporation

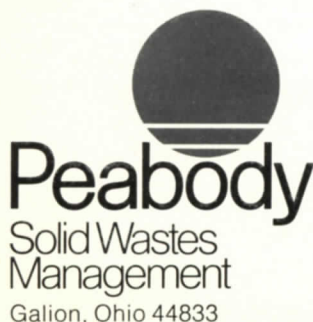

Distributed by:

VIKING ASSOCIATES, INC.  
2050 N. BROADWAY  
CREST HILL, ILL. 60435  
815-723-9396

ClassicRefuseTrucks.com Library