


## Renault Puncher Refuse collection truck



### **RENAULT PUNCHER 4 x 2**

## Refuse collection truck with 14.5m³ rear loading capacity

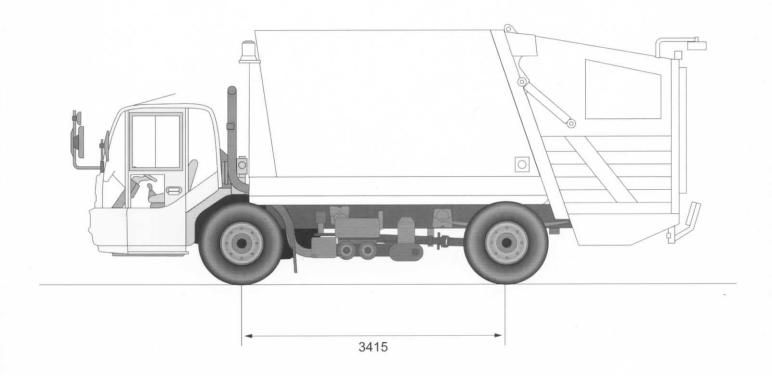

Range	Silhouette	Model	Wheelbase	GVW	Width	Body	Volume
PUNCHER	4x2	270.19	3415	18 T	2360 mm	Variopress 3	14.5 m³

#### Equipment / Application :

Rigid vehicles, with a "rear loading" refuse collection body. Low cab entry allowing easy, quick and safe access to the cab interior.


## RENAULT Puncher has been developed and adapted for rigorous use combined with simple and efficient refuse collecting.

- Chassis with low cab position in order to offer the best load capacity (payload and volume) with the best refuse compactness.
- · Reduced chassis width and short wheelbase results in a compact vehicle with an excellent turning radius.
- Hub reduction rear axle and rear air suspension result in safe access to the most hazardous of landfill / waste disposal sites.

Standard Characteristics	Puncher 270.19 4x2
Chassis dimensions: 300 x 80 x 7 mm	X
Allison automatic gearbox	X
Hydrocar gearbox PTO (Torque: 400Nm; gear: 0.93) shaft outlet	X
Front parabolic suspension with anti-roll bar	X
Rear air suspension with anti-roll bar	X
Front: 315/60 R22.5, tyres XZU	X
Without spare wheel	X
Lowered cab: flat floor: folding passenger door + sliding window	X
Kerb to kerb turning radius	6600 mm
Mandatory option	

## **RENAULT PUNCHER 6 x 2\*4**

## Refuse collection truck with 20m³ rear loading capacity

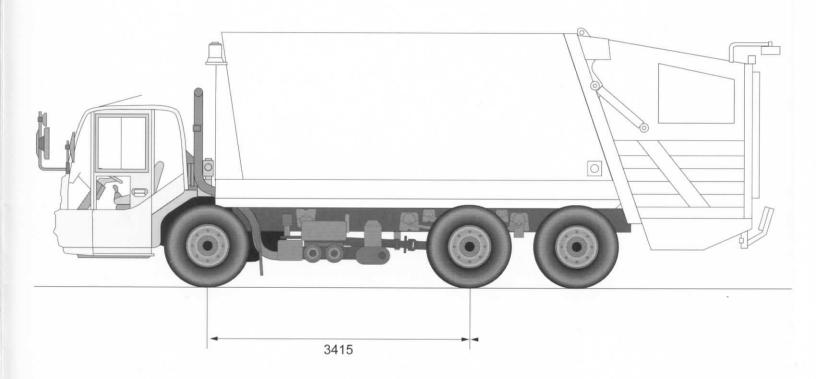

Range	Silhouette	Model	Wheelbase	GVW	Width	Body	Volume
PUNCHER	6 x 2*4	270.26	3415 + 1387	25 T	2360 mm	Variopress 3	20 m <sup>3</sup>

#### **Equipment / Application:**

Rigid vehicles, with a "rear loading" refuse collection body. Low cab entry allowing easy, quick and safe access to the cab interior.

#### RENAULT Puncher has been developed and adapted for rigorous use combined with simple and efficient refuse collecting.

- · Chassis with low cab position in order to offer the best load capacity (payload and volume) with the best refuse compactness.
- · Reduced chassis width and short wheelbase results in a compact vehicle with an excellent turning radius.
- Hub reduction rear axle and rear air suspension result in safe access to the most hazardous of landfill / waste disposal sites.

Standard Characteristics	Puncher 270.26 6x2*4
Chassis dimensions: 300 x 80 x 7 mm	X
Allison automatic gearbox	X
Hydrocar gearbox PTO (Torque: 400Nm; gear: 0.93) shaft outlet	X
Front parabolic suspension with anti-roll bar	X
Rear air suspension with anti-roll bar	X
Front: 315/60 R22.5, tyres XZU Rear: 275/70 R22.5, tyres XZU and 315/60 R22.5, tyres XZU	X
Without spare wheel	X
Lowered cab: flat floor: folding passenger door + sliding window	X
Kerb to kerb turning radius	6600 mm
Mandatory option	

## **RENAULT PUNCHER 6 x 2\*4**

# Refuse collection truck with 26m³ rear loading capacity



Range	Silhouette	Model	Wheelbase	GVW	Width	Body	Volume
PUNCHER	6 x 2*4	270.26	4015 + 1387	26 T	2500 mm	Sidepress	26 m³

#### **Equipment / Application:**

Rigid vehicle with a "side loading" tipping refuse collection body. Low cab entry allowing easy, quick and safe access to the cab interior.

### RENAULT Puncher has been developed and adapted for rigorous use combined with simple and efficient refuse collecting.

- · Three-axle rigid, long, completely clear wheelbase, to allow fitment of side loading equipment.
- · Rear steering axle for an excellent turning radius.
- Hub reduction rear axle and rear air suspension result in safe access to the most hazardous of landfill / waste disposal sites.

Puncher 270.26 6x2*4		
X		
X		
X		
X		
X		
X		
X		
7580 mm		
CONTRACTOR OF CITED STORY		
X		
X		

Non-contractual and non-exhaustive document. Contact us for information on other models.

#### **RENAULT TRUCKS UK LTD**

Boscombe Road - Dunstable - Beds - LU5 4LX

#### FAUN MUNICIPAL SERVICE VEHICLES LTD

Bryn Cefni Industrial Estate - Llangefni Isle of Anglesey - North Wales - LL77 7XA