

HEIL COLECTO-PAK
GARBAGE COLLECTION UNITS

COLECTO-PAK

Water and odor-tight body; compresses 20 yards of garbage into a 10 yard body; complete hydraulic operation; bucket dumps in less than 30 seconds; tapered body construction for faster load discharge.

SPECIFICATIONS

Body Capacity	10 Yd.
Maximum Body Length	12'5"
Maximum Operating Height	10'7"
Maximum Body Height	82¼"
Inside Body Width	7'0"
Unit Weight	5800 lb.

HEIL

TRUCK BODIES




HEIL COLECTO-MATIC
GARBAGE-REFUSE COLLECTION UNITS

COLECTO-MATIC

Newest enclosed refuse unit available today, the Colecto-Matic performs all loading, packing, and dumping functions with only three hydraulic cylinders—automatically. Compaction unit (rear Packing type); low loading height (36" average); side loading utility door is standard.

DIMENSIONS

Body Capacity	16 cu. yd.
Loading Height	36"
Length, Cab-to-Axle	102"
Length, Axle to Rear of Body (Body and Tailgate Down) (Body and Tailgate Up)	92" 188"
Height, From Top of Chassis (Body Down) (Body Up)	85" 136"

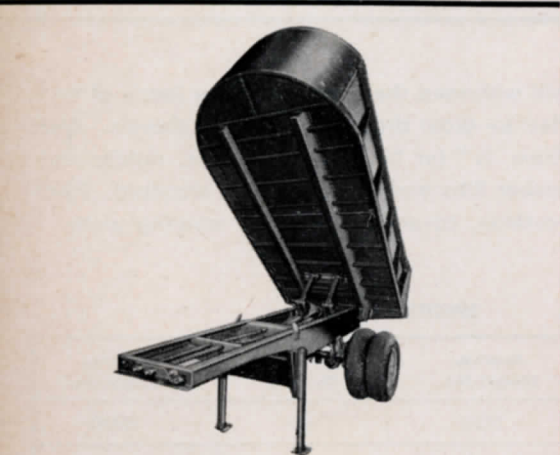

HEIL "TRAILERIZED"
HYDRAULIC DUMP UNIT

TRAILER DUMP

"Trailerized" hydraulic dump units for hauling materials such as sand, gravel, and crushed stone are available in 30,000 to 40,000 payload capacities. Weight-saving frame, twin-cylinder, twin-arm Heil hydraulic hoist with special low, inside frame mounting as space saving feature.

SPECIFICATIONS

	Model BU-29	Model BU-30
Axle Capacity (Rated Capacity) (Max. Payload)	26,400 lb. 30,000 lb.	35,700 lb. 40,000 lb.
Length of Trailer (C/L king pin to C/L rear axle)	141"	141"
Length of Body (Recommended)	16'-18'	16'-18'
Tires (Dual)	11:00/20-12 ply	12:00/24-14 ply
WEIGHT (Trailer frame, running gear and hoist)	4060 lb. (Approx.)	5300 lb. (Approx.)
Standard Equipment: Pump, Control Valve, Cab Controls, and Connecting parts.		