


LAM FRONT LOADER

Travel Height 152 Inches Based on 42 Inch High Chassis Frame

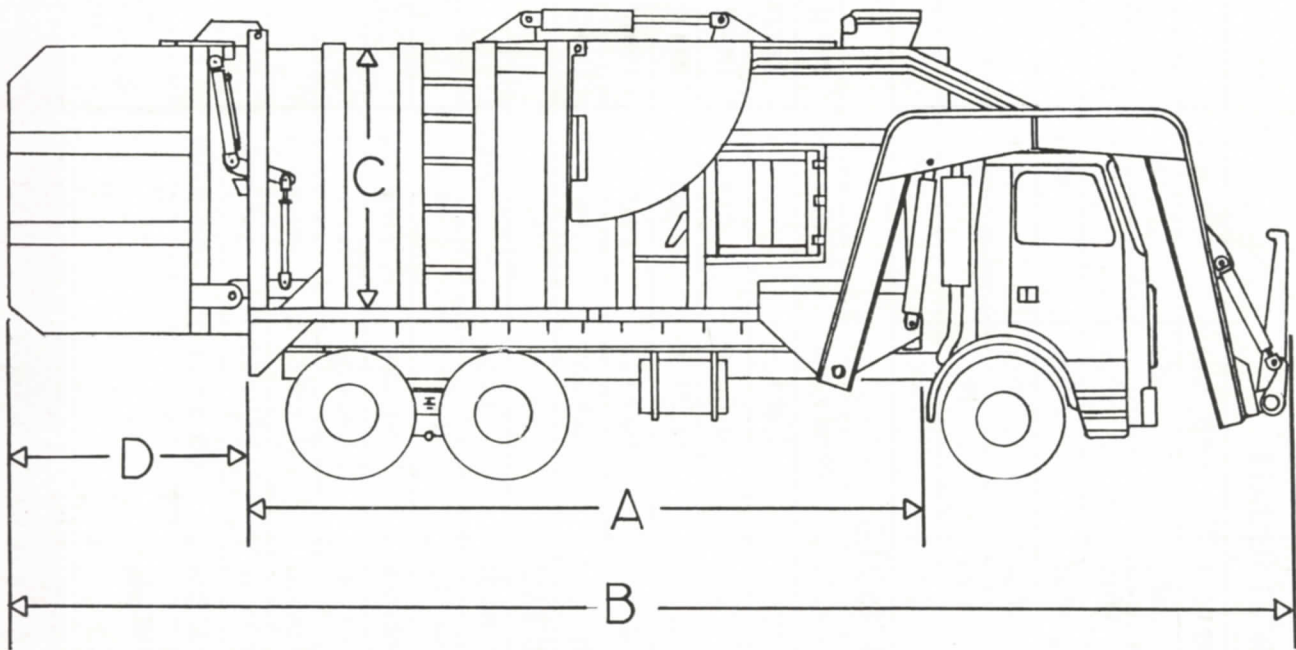

DIMENSIONAL DATA							
<small>*Add 20" for Non-Vertical Tilt Loaders</small>							
Body Size	Overall Width	Body Length (A)	Overall Length* (B)	Hopper Opening	Inside Width	Inside Height (C)	Tailgate Length (D)
26 cu. yd.	96 in.	209 in.	340 in.	81 w x 87 l	81 in.	83 in.	12¼ in.
30 cu. yd.	96 in.	209 in.	364 in.	81 w x 87 l	81 in.	83 in.	36 in.
34 cu. yd.	96 in.	209 in.	390 in.	81 w x 87 l	81 in.	83 in.	62½ in.
HC 34 cu. yd.	96 in.	235 in.	394 in.	81 w x 87 l	81 in.	83 in.	36 in.
HC 38 cu. yd.	96 in.	235 in.	420 in.	81 w x 87 l	81 in.	83 in.	62½ in.

CHASSIS REQUIREMENTS					
Body Size	Wheel Base	Front Axle	Tandem Rear Axle	Minimum GVWR	Total Frame From Cab
26 cu. yd.	161 in.	18,000 lb.	34,000 lb.	52,000 lb.	255 in.
30 cu. yd.	167 in.	18,000 lb.	38,000 lb.	56,000 lb.	255 in.
34 cu. yd.	173 in.	18,000 lb.	44,000 lb.	62,000 lb.	255 in.
HC 34 cu. yd.	173 in.	18,000 lb.	44,000 lb.	62,000 lb.	280 in.
HC 38 cu. yd.	181 in.	18,000 lb.	46,000 lb.	64,000 lb.	280 in.

STANDARD EQUIPMENT

- Automatic Hydraulically Actuated One Piece Hopper Cover
- Hopper Doors and Body Compactor Interlock Controls
- Top Hinged Hydraulically Opened Tailgate
- Hydraulically Operated Tailgate Locks
- RH Body Side Door
- Body Side Ladder
- Rung Type Step Under Body Side Door
- Tailgate Open Indicator Alarm
- Rear and Front Tandem Mud Flaps
- Weatherproof Switches with Cold Weather Seals
- Positive Rod Controls Self-Connecting and Disconnecting
- Imron Paint

Lödal, Inc.

KINGSFORD, MICHIGAN 49801
 U.S. Watts 1-800-435-3500
 Mich. Watts 1-800-435-3600

LAM FRONT LOADERS STANDARD SPECIFICATIONS

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Model Codes TC = One Point (Triangle) Hookup TF = Two Point (Fork) Hookup	Standard Compaction						High Compaction	
	TC or TF-826	TC or TF-830	TC or TF-834	TC or TF-1026	TC or TF-1030	TC or TF-1034	TC or TF-1034 HC	TC or TF-1038 HC
Loader Model	TC or TF-826	TC or TF-830	TC or TF-834	TC or TF-1026	TC or TF-1030	TC or TF-1034	TC or TF-1034 HC	TC or TF-1038 HC
Body Size	26 cu. yd.	30 cu. yd.	34 cu. yd.	26 cu. yd.	30 cu. yd.	34 cu. yd.	34 cu. yd.	38 cu. yd.
Body Weight	17,400 lbs.	17,675 lbs.	17,850 lbs.	18,000 lbs.	18,225 lbs.	18,450 lbs.	21,375 lbs.	21,700 lbs.
Hopper Capacity	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.	10.5 cu. yd.
Lift Capacity	8000 lbs.	8000 lbs.	8000 lbs.	10,000 lbs.	10,000 lbs.	10,000 lbs.	10,000 lbs.	10,000 lbs.
Tailgate Capacity	1 cu. yd.	5 cu. yd.	9 cu. yd.	1 cu. yd.	5 cu. yd.	9 cu. yd.	5 cu. yd.	9 cu. yd.
Oil Reservoir	55 gal.	55 gal.	55 gal.	55 gal.	55 gal.	55 gal.	70 gal.	70 gal.
CYLINDERS – All Double Acting								
Lift	(2 ea.) 4 1/2" x 35"	4 1/2" x 35"	4 1/2" x 35"	5" x 35"	5" x 35"	5" x 35"	5" x 35"	5" x 35"
Fork or Triangle	(2 ea.) 4" x 22 3/16"	4" x 22 3/16"	4" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"
Top Door-One pc. (1 ea.)	4" x 22 3/16"	4" x 22 3/16"	4" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"	4 1/2" x 22 3/16"
Top Door-Two pc. (2 ea.)	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"	3 1/2" x 10"
Tailgate	(2 ea.) 4" x 17 9/16"	4" x 20"	4" x 20"	4" x 17 9/16"	4" x 20"	4" x 20"	4" x 20"	4" x 20"
Packing	(1 ea.) 8 1/2" 4 Stage	8 1/2" 4 Stage	8 1/2" 4 Stage	8 1/2" 4 Stage	8 1/2" 4 Stage	8 1/2" 4 Stage	9 3/4" 5 Stage	9 3/4" 5 Stage
STEEL GAUGE – 50,000 PSI Minimum								
Sides	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	7 ga.	7 ga.
Roof	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.
Floor	10 ga.	10 ga.	10 ga.	10 ga.	10 ga.	10 ga.	1/4"	1/4"
Top Door	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.	12 ga.
Tailgate	10 ga.	10 ga.	10 ga.	10 ga.	10 ga.	10 ga.	7 ga.	7 ga.
Side Shields	7 ga.	7 ga.	7 ga.	7 ga.	7 ga.	7 ga.	7 ga.	7 ga.
Forks	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel	1" T-1 Steel

HYDRAULICS – Common To All Models

- Oil Tank Sight Level Gauge
- 4 Spool Sectional Valve
- Suction Line Shutoff
- Replaceable 100 Mesh Screen Suction Filter
- Replaceable 10 Micron Return Line Filter
- 38 GPM Gear Pump at 1800 RPM
- 2000 PSI Loader Operating Pressure
- 1850 PSI Packer Operating Pressure