




Takes all sizes of containers

The PACKMASTER will easily handle containers from 1 to 10 cubic yard. A variety of attachments are available from cables on the packer blade to a hydraulic container lift to an overhead winch hoist. Ask your LEACH distributor for details on the attachment best suited to your needs.



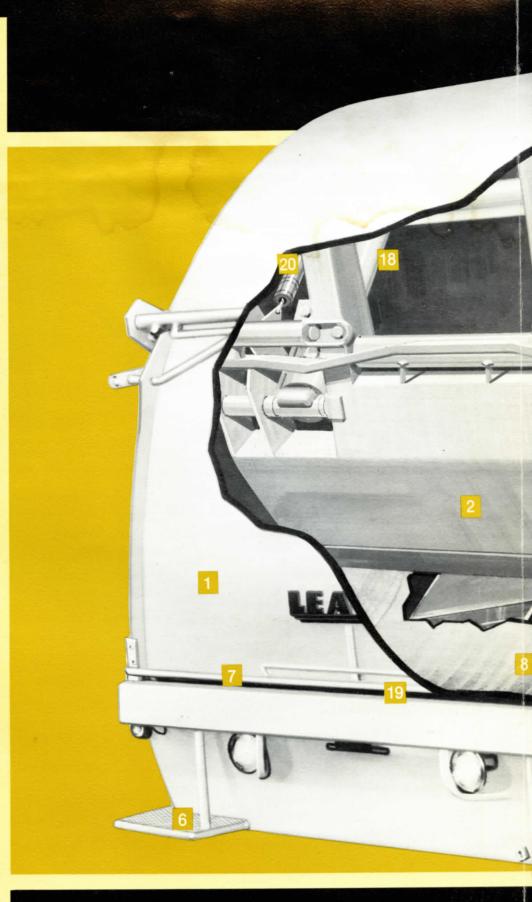

Leach Standard Packmaster®

standard features

- 1 Hopper Safety Door
- 2 Packer Plate
- 3 Push-Out Plate
- 4 Push-Out Cylinder Clamping System
- 5 Push-Out Bar
- 6 Non-Skid Riding Steps
- 7 Low Loading Height (5" below truck frame)
- 8 Fully Usable Hopper 77" x 48" x 54"
- 9 Pre-Stressed Extra Strength Side Channels
- 10 Tailgate Lift Lever (Dual Mounted)

- 11 Push-Out Plate Lever (Dual Mounted)
- 12 Seven Step, Baked-On Enamel Finish
- 13 Triple Horizontal Corrugations . . . For Extra Strength and Rigidity
- 14 Tailgate Clamping Turnbuckles
- 15 Standard Truck Chassis
- 16 Hydraulic Oil Tank
- 17 Durable Steel Rollers
- 18 Heavy-Duty Double-Acting Packing Cylinders
- 19 Reinforced Steel Hopper Loading Edge
- 20 Double-Acting Packer Plate Holding Cylinder

the hidden, inside value story Underneath its outer shell the LEACH STANDARD PACKMASTER is built to do the incredibly tough job of collecting refuse . . . better than any other unit in its class.

LEACH designed . . . with over 90% of its basic components created and assembled right in the LEACH plant . . . it is uniquely adaptable for all kinds of route conditions.

Accepted by all users . . . municipalities, contractors, industries and institutions . . . it has performed more than adequately over thousands and thousands of working hours . . . consuming all types of refuse.

Often called the "Standard" to which others are compared, the LEACH STANDARD PACKMASTER is built stronger to last longer. It was planned that way to perform that way.

Features on all

Leach Standard Packmasters




Packer plate Constructed of 5/16" EX-TEN 50 steel for extra durability. Steel in the bolted, cutting edge is equal to that used in the finest quality road grader blades.



Main operating valve Controls raising and lowering of tailgate and operation of packing mechanism. Valve is precision manufactured by LEACH to meet exacting quality control standards.



Crushes refuse into greater payloads The packer plate, powered by two 6" double-acting cylinders, reaches out over the load in the hopper and crushes as it compacts the refuse into the body. Refuse is retained by the packer plate after the packing cycle is completed.



Extra strong tailgate and hopper The PACKMASTER's hopper is designed for the toughest jobs...it is braced, pre-stressed and reinforced to withstand years of hard work and the tremendous stresses of all types of refuse.





One lever control for packer plate A popular built-in feature since the first PACK-MASTER was built... a single movement of one lever closes the safety door and starts the automatic packing cycle... no holding or manipulation of levers is required . . . crews can be trained in minutes.



7-step baked-on enamel finish Every LEACH body is given a seven-step finish... rough edges are ground smooth. The body is degreased, then shot blasted, primed, painted with two coats of high quality enamel and then the enamel is baked on for a hard durable finish at 240° Fahrenheit. The result is the toughest and best looking finish available.

EX-TEN 50 is a registered trademark of U.S. Steel.

There is a Standard Packmaster built to meet every need...in every market.

- large contractor = small contractor = industrial
 institutions = large city = small city



Available in a size to meet every need.



20 cu. yd.







25 cu. yd.



Packmaster Acceptance is the result of Leach quality manufacturing





Sanitation is our <u>on</u>ly business





SANITATION HEADQUARTERS

VEST ADAMS STREET . CHICAGO, ILLINOIS 80808

INTERNATIONAL DISTRIBUTION ELGIN LEACH INTERNATIONAL, INC. 222 WEST ADAMS STREET - CHICAGO, ILLINOIS SOSOS