

Leach *SaniCruiser*®

S
P
E
C
I
F
I
C
A
T
I
O
N
S




SYSTEMS IN
SANITATION

Standard of Excellence

- All usable, 2 cubic yard hopper
- Takes virtually all types of refuse
- Single-Lever Packer Plate Control
- Single-Lever Push-Out Control
- Clean Push-Out Plate Design
- Sleek Modern Design
- Extra Strength and Rigidity

LEACH
GUARANTEED QUALITY

America's most efficient refuse collection systems

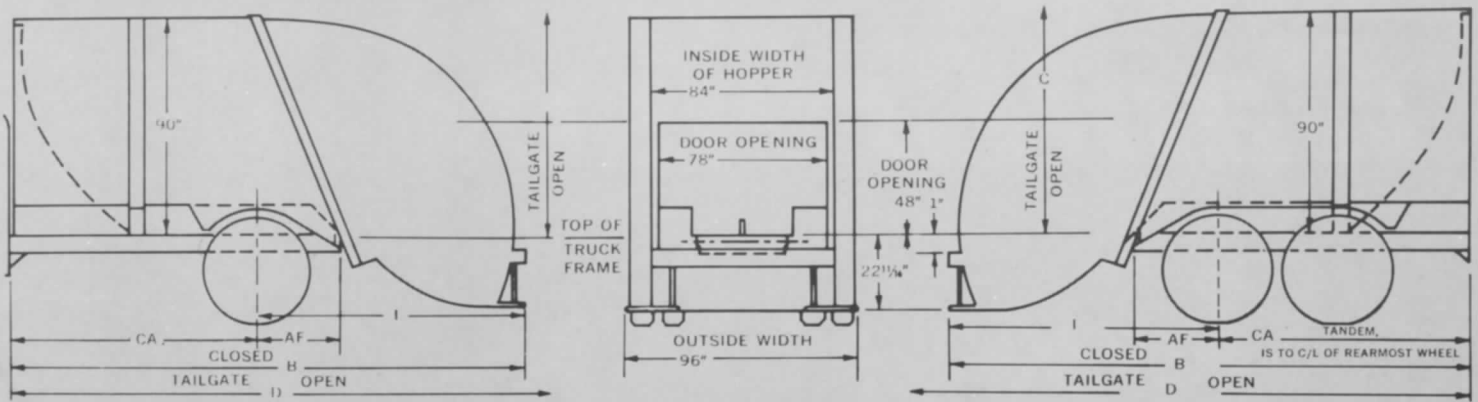

Dimensions

Single axle

CAPACITY	AF	B	C	CA	D	I	NET WEIGHT	HOPPER CAPACITY
16 YD.	35 1/2	205 3/8	150	108*	267 3/8	99 3/8	10,860	2 YD.
17 YD.	34 1/2	218 3/8	150	120*	270 3/8	98 3/8	11,480	2 YD.
20 YD.	34 1/2	233 3/8	150	135*	295 3/8	98 3/8	11,690	2 YD.

*Note: CA dimensions shown may be shorter or longer depending on load distribution limitations and turning radius requirements. CA must be usable with no obstructions protruding above frame. CA is measured to center line of rearmost axle.

Tandem axle

CAPACITY	AF	B	C	CA	D	I	NET WEIGHT	HOPPER CAPACITY
20 YD.	25 1/2	233 3/8	150	144*	295 3/8	89 3/8	11,690	2 YD.
25 YD.	30 1/2	260 3/8	150	166*	322 3/8	94 3/8	12,280	2 YD.

*Note: The truck selected must be capable of carrying net weight of body plus weight of refuse to be collected. On Tandem Chassis CA dimension is to C/L of rearmost wheel.

*Cable type or Hydraulic container attachments and Overhead Winch-hoist are available on 16, 17, 20 and 25 cubic yard models. Hopper Door is available for 16, 17, 20 and 25 cubic yard models. Specifications subject to change without notice. The SaniCruiser is manufactured by LEACH COMPANY, OSHKOSH, WISCONSIN and is sold nationally through the distributor organization of ELGIN LEACH CORPORATION.

Note: When hydraulic container attachment is installed, Hopper Door not available and raises loading height approximately 3 1/2 inches.

Special Note: Truck equipped with diesel engine requires full variable speed governor.

Body

- 16, 17, 20 and 25 yard capacities.
- Sides and top are made of 11 gauge steel. Bottom is 11 gauge and 3/16" thick steel.
- Sides, front and rear reinforced with electrically welded box-sections.
- Contents of body sealed off from outside during compaction period.
- Steps and grab handles both sides of tailgate.
- Buzzer system provided at rear to enable loaders to signal driver.
- Load is pushed out by simple, easily maintained double acting cylinder.

Finish

Baked on enamel finish.

Tailgate

- 2 cubic yard hopper capacity.†
 - Constructed of EX-TEN or equal alloy steel.
 - Packer plate constructed of EX-TEN steel.
 - Opens wide and stays clear of unloaded refuse when driving from unloading area.
 - Single lever-control operates packing mechanism.
- †Hopper capacity is rated in accordance with standard industry practice.

Specifications subject to change without notice.

ELGIN LEACH CORPORATION
 875 ANTON STREET
 WATERLOO, ILLINOIS 62292
 525-0200 525-3200

You get more into it
 because we put more into it

LEACH



Pacesetter in Sanitation

E Elgin Leach Corporation

2 North LaSalle St.
 Chicago, Illinois 60602

International Distribution:
 Elgin Leach International, Inc.
 2 North LaSalle Street • Chicago, Illinois 60602