

Leach[®] 2-F Front Loader



S
P
E
C
I
F
I
C
A
T
I
O
N
S



Tough, durable, maximum payloads, minimum downtime


- Available in 25, 31 and 35 cubic yard capacities.
- Heavy-duty, 9,000 lb. capacity lift arms.
- Leach exclusive, rugged "parallelogram designed," self-leveling fork mechanism.
- Side opening top doors provide wind screen for large, "chute-type" hopper opening.
- 8½" 3-stage telescopic cylinder . . . fewer wearing parts.
- Specially contoured rugged packer plate designed to pack better payloads.
- Automatic tailgate latching and unlatching. No need for operator to leave cab to unload.
- Strong "wrap around" body construction.
- Leach exclusive baked-on enamel finish.



America's most efficient refuse collection systems

Leach 2-F Front Loader

SPECIFICATIONS

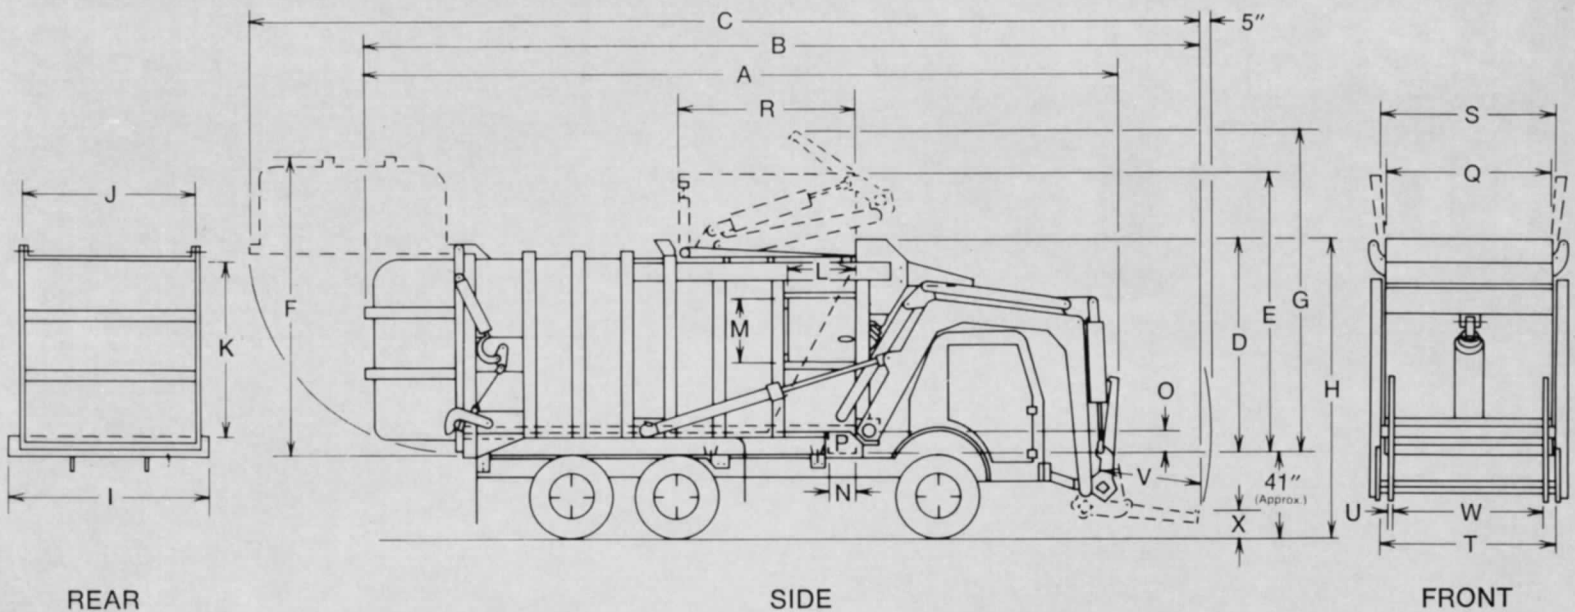

Body Dimensions

	25 cu. yd.	31 cu. yd.	35 cu. yd.
A—Over-all length—rear door closed-forks parked	27'0"	30'3"	32'0"
B—Over-all length—rear door closed-forks down	30'9"	34'0"	35'9"
C—Over-all length—rear door open-forks down	38'4"	38'4"	38'4"
D—Height above truck frame—rear door closed-top doors closed	9'1"	9'1"	9'1"
E—Height above truck frame—rear door closed-top doors open	11'5"	11'5"	11'5"
F—Height above truck frame—rear door open-top doors closed	9'7"	12'5"	14'2"
G—Height above truck frame—forks in container dump position	13'5"	13'5"	13'5"
H—Height—Mounted rear door, top doors, arms-closed (Approx.)	12'6"	12'6"	12'6"
I—Body—outside width	95 ³ / ₄ "	95 ³ / ₄ "	95 ³ / ₄ "
J—Body—inside width	80"	80"	80"
K—Body—inside height	87"	87"	87"
L—Side door—width	35"	35"	35"
M—Side door—height	28"	28"	28"
N—Body sump—width	16"	16"	16"
O—Body sump—depth	10"	10"	10"
P—Body sump—capacity	60 gal.	60 gal.	60 gal.
Q—Top door hopper opening—width	80"	80"	80"
R—Top door hopper opening—length	88"	88"	88"
S—Top door "open width" at top of doors	83 ⁵ / ₈ "	83 ⁵ / ₈ "	83 ⁵ / ₈ "
T—Lift arms—inside width	86 ⁵ / ₈ "	86 ⁵ / ₈ "	86 ⁵ / ₈ "
U—Fork—thickness	1 ¹ / ₄ "	1 ¹ / ₄ "	1 ¹ / ₄ "
V—Fork—working length	52 ⁷ / ₈ "	52 ⁷ / ₈ "	52 ⁷ / ₈ "
W—Fork—inside width	78 ³ / ₄ "	78 ³ / ₄ "	78 ³ / ₄ "
X—Fork—height off ground (Approx.)	13"	13"	13"

Body Construction (all sizes)

Sides	11 ga. Hi Tensile
Top	11 ga. Hi Tensile
Floor	3/16" Hi Tensile

Tailgate (all sizes)

Raised and lowered hydraulically
Latching and unlatching are automatic
Cylinders—(2) 4" Diameter

Packing and Ejection Cylinder

8¹/₂" Diameter Double Acting Telescopic
Cylinder—3 stage

Hydraulic System

Pump—30GPM @ 1000 RPM
Maximum Operating Pressure—1750 PSI
Hydraulic Tank Capacity—89 gal.

Lift Arm & Fork Mechanism (all sizes)

9,000-pound Lift Arm Capacity
Self Leveling Forks

Cylinders:

- (2) Lift 5" Diameter x 55" Stroke
- (2) Tilt 4" Diameter x 26¹/₂" Stroke

Dimensions subject to change without notice.

C. N. WOOD CO., INC.
570 ARSENAL STREET
WATERTOWN, MASS. 02172
923-0200 926-3200

Nobody does it better

LEACH 
Pacesetter in Sanitation

Elgin Leach Corporation

2 North LaSalle St.
Chicago, Illinois 60602

International Distribution:
Elgin Leach International, Inc.
2 North LaSalle Street • Chicago, Illinois 60602