

SPECIFICATIONS | LEACH STATIONARY PACKER | 2-R MODELS

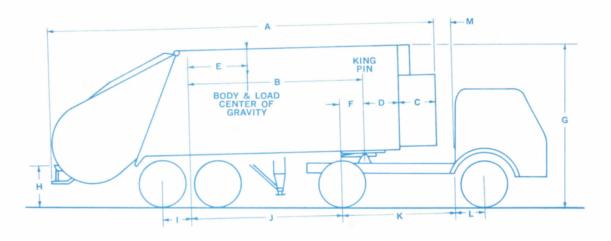

DIMENSIONS: TRAILER

F-4-7-12														
SIZE	A	В	С	D	E	F	G	Н	1	J	K	L	М	
20 YD.	282%	1231/2	33		24.4	3	142	361/2	251/2	1201/2	72	27	36	Provides 27" clearance when turning
25 YD.	303%	121¾	33	223/4	31.4	3	142	361/2	251/2	118¾	72	27	131/4	Provides 7½" clearance when turning
31 YD.	3491/2	158	33	32	53.3	21	142	361/2	251/2	137	102	27	16	Provides 11" clearance when turning



DIMENSIONS: HOPPER

CAPACITY	Ν	0	Р	Q	
2 CU. YD.	16	82	56	80	

BODY

- Sides and top are made of 11 gauge steel. Bottom is ¼" thick steel.
- Sides, front and rear reinforced with electrically welded box-sections.
- 3. Contents of body sealed off from outside during compaction period.
- Steps and grab handles both sides of tailgate.
- Buzzer system provided at rear to enable loaders to signal driver.
- 6. Load is pushed out by simple, easily maintained double acting cylinder.

POWER SOURCE

- 1. Truck Engine through P.T.O.
- 2. Gasoline Engine
- 3. Diesel Engine
- 4. Electrical Motor
- 5. Any combination of above four power sources

TAILGATE

- 1. 2 cubic yard hopper capacity.
- Entirely constructed of EX-TEN or equal alloy steel,
- Packer and carrier plates constructed of %" thick EX-TEN steel.
- 4. Opens wide and stays clear of unloaded refuse when driving from unloading
- Dual safety door can be operated automatically.
- 6. Single lever control.

UNDERCARRIAGE (Trailer)

Includes axles, wheels (7.5 x 20 rims), $10:00 \times 20$, 12-Ply tires and tubes, Suspension System, Landing Gear and King Pin. 5th Wheel to be included as part of the Tractor Specification, and not part of the Undercarriage.

FINISH: Baked on enamel finish.

C. N. WOOD CO., INC. 570 ARSENAL STREET WATERTOWN, MASS. 02172 923-0200 — 923-0201




Sanitation is our only business

ELGIN LEACH CORPORATION




SANITATION HEADQUARTERS
222 West Adams Street • Chicago, Illinois 60606

SPECIFICATIONS | LEACH STATIONARY PACKETS

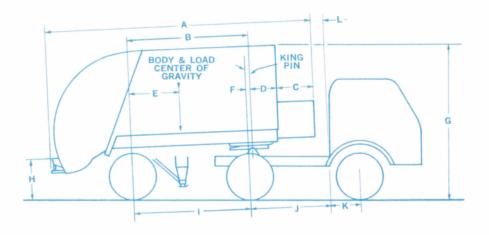

DIMENSIONS: TRAILER

	SIZE	А	В	С	D	E	F	G	н	-1	J	K	L	
	13 YD.	204%	9613/6	33	5%s	32	3	139	36	99	72	27	413/16	Provides 31" clearance when turning
	16 YD.	2275/6	102	33	1713/6	411/2	3	139	36	99	72	27	183/6	Provides 121/2" clearance when turning
	17 YD.	240%	10813/6	33	24	45	3	139	36	10513/16	72	27	12	Provides 6½" clearance when turning
Š	20 YD.	255%	12313/6	33	24	53	3	139	36	12013/16	72	27	12	Provides 61/2" clearance when turning



BODY

- 1. Sides and top are made of 11 gauge steel. Bottom is 1/4" thick steel.
- 2. Front and rear reinforced with electrically welded box section. Sides reinforced by 1" corrugations.
- 3. Contents of body sealed off from outside during compaction period.
- 4. Steps and grab handles both sides of tailgate.
- Buzzer system provided at rear to enable loaders to signal driver. Load is pushed out by simple, easily maintained double acting cylinder.

POWER SOURCE

- 1. Truck Engine through P.T.O.
- 2. Gasoline Engine
- 3. Diesel Engine
- 4. Electrical Motor
- 5. Any combination of above four power sources

TAILGATE

- 1. 11/4 cubic yard hopper capacity.
- 2. Constructed of EX-TEN or equal alloy steel.
- 3. Packer and carrier plates constructed of 36" thick EX-TEN steel.
- 4. Opens wide and stays clear of unloaded refuse when driving from unloading
- 5. Dual door can be operated automatically.
- 6. Single lever control.

UNDERCARRIAGE (Trailer)

Includes axles, wheels (7.5 x 20 rims), 10:00 x 20, 12-Ply tires and tubes, Suspension System, Landing Gear and King Pin. 5th Wheel to be included as part of the Tractor Specification, and not part of the Undercarriage.

FINISH: Baked on enamel finish.



Sanitation is our only business

ELGIN LEACH CORPORATION



SANITATION HEADQUARTERS

222 West Adams Street • Chicago, Illinois 60606