

# **LOAD-MASTER<sup>®</sup>**

## **300 Series**



## **The Versatile Machine**

***Residential • Municipal • Commercial***


**Dependable Service  
Heavy Duty Construction**

**Large 2 Cu. Yd. Hopper  
Unsurpassed Reputation**

# LOAD-MASTER

## 300 Series Rear Loader

### SPECIFICATIONS

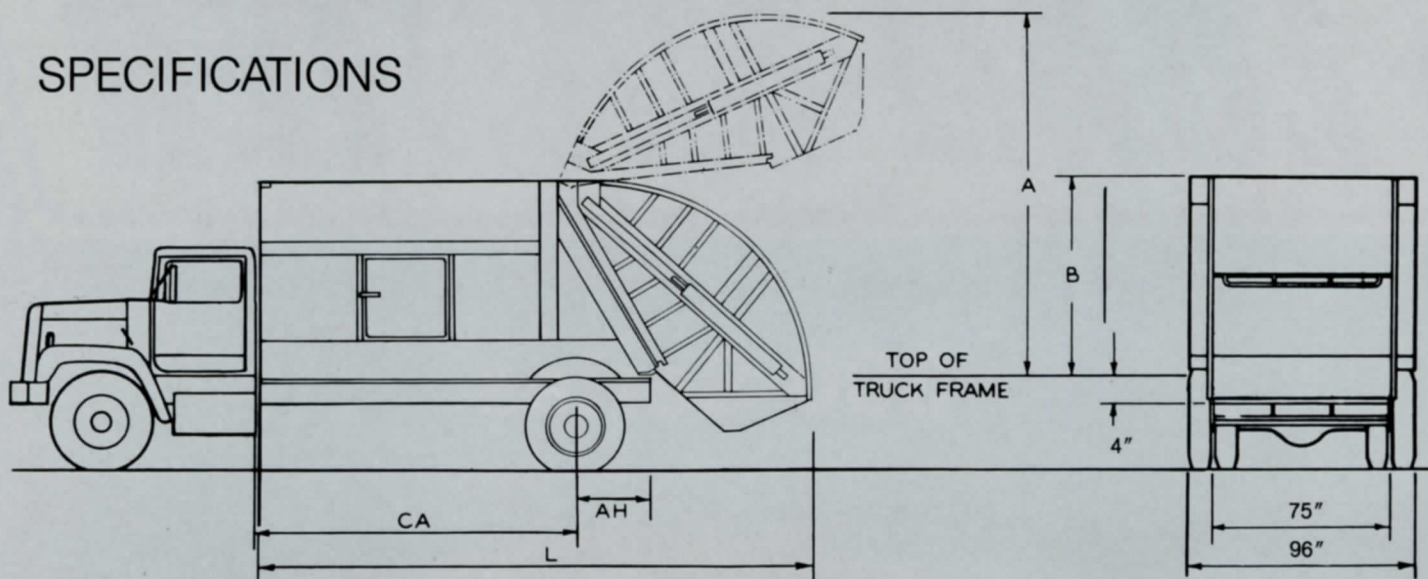

### Dimensions

LOAD-MASTER MODEL	CAPACITY CU. YDS.	A INS.	B INS.	CA INS.	AH INS.	L INS.	WT. LBS. APPROX.	HOPPER CAPACITY CU. YDS. LOADED
LM-316	16	149	85	106	36	202	10,800	2
LM-318	18	149	85	128	36	222	11,300	2
LM-320	20	149	85	138	36	235	11,500	2

### Container Handling Devices

The most efficient rear-loader container handling system available! Quick, smooth, positive, efficient —simple to maintain. Works totally independent of packing cycle. Single overhead double-acting hydraulic cylinder, with capabilities to fit your day-to-day needs. Model ranges as follows:

- Model 1-2 — 1 to 2 yard containers
- Model 2-6 — 2 to 6 yard containers
- Model 1-6 — The complete range

### BASIC LOAD-MASTER LM-300 SERIES DATA

#### Body

Floor ..... 11 gauge High Tensile  
 Sides ..... 11 gauge High Tensile  
 Roof ..... 11 gauge High Tensile  
 Understructure of Body — Full Width  
 Crossmembers Integral with Body Floor

#### Tailgate

Hopper Floor ..... 1/4" High Tensile  
 Packing Plate ..... 1/4" High Tensile  
 Hopper Sides ..... 11 ga. High Tensile  
 Hopper Capacity ..... 2 cu. yds.  
 Loading Height ..... 4" Below Frame


#### Hydraulic Systems

27 G.P.M. Gear Pump  
 Multiple Balanced Spool-type valves  
 with Adjustable Cartridge Relief  
 All Cylinders—Chrome plated  
 Plunger Rods

**Note: Truck equipped with diesel engine requires variable speed governor.**

### Compare These Features with the Unit You're Now Using

Manufactured By:  
 City Tank Corporation



Marketed Internationally By:



PHONE (904) 725-7214  
 6501 ARLINGTON EXPRESSWAY, SUITE 103  
 JACKSONVILLE, FLORIDA 32211

Distributed Locally By:

Casey & Dupuis Equipment Corp.  
 340 Pleasant Street  
 Watertown 72 - Mass.  
 WA 4-7575