

BULK REFUSE CONTAINERS



For all systems from



Shelvoke and Drewry Limited . Letchworth . Hertfordshire



'Refcon' bulk refuse container

'Refcon' range

Seven standard 'Refcon' bulk containers are marketed by Shelvoke and Drewry Limited. These are the '750' suitable for use with SD Fore and Aft Tipper Container Handling System, the '751', an alternative model to the '750' with triple strengthening swages instead of mild steel bands. The '752' and heavy duty '752a' for use with SD Squeeze Clamp systems available on SD Pakamatic and Revopak vehicles. The '753' fitted with tubular lifting bar for Glover Webb and Liversidge equipment. The '754', a container purpose-built for girth clamping systems such as Gibson Pendulum and Eagle Compressmore and the '755', a trunnion lift unit for use with Dennis Paxit machines.


'Refcon' strength

All the standard 'Refcon' containers are galvanised after assembly with heavy duty steel bottom and ample strengthening swages or bands. To ensure long life, all 'Refcon' containers are of all-welded construction with heavy duty reinforcement around lifting bars or trunnions, thus spreading shock loads evenly.

ers...

'Refcon' data

The illustrations on this page serve for 'Refcon' model identification; for additional data on lifting gear suitability, dimensions and capacities etc see over.

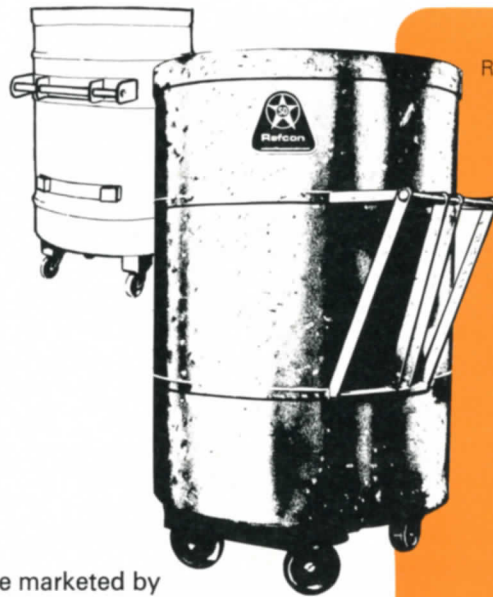


Refcon 750/751



Refcon 752/752a



Refcon 753

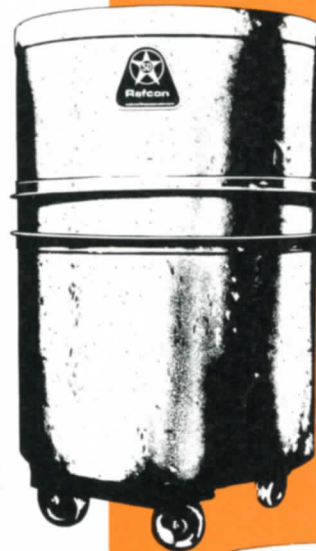


Refcon 754



Refcon 755

'Refcon' lids

Three standard lid patterns are available for 'Refcon' containers. These are (see right) the 'Plain' pattern provided with twin lifting handles, the 'D' pattern allowing a 50% hinged opening and the 'O' pattern giving an 18" (457mm) diameter lipped opening covered by a Rubbatex cover.

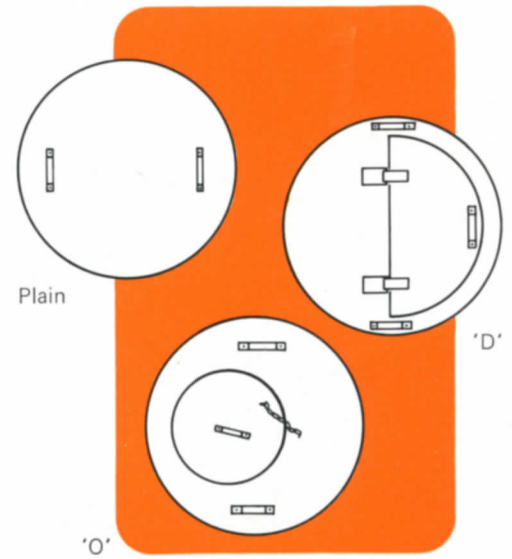

'Refcon' castors

Standard arrangement; two fixed and two swivel 5" (127mm) diameter nylon castors.
Standard ground clearance 10" (254mm).
Other castor/wheel arrangements available on request. Angle iron legs are also available.

Special requirements

As a primary consideration to operating efficiency, top priority has been given to refuse container standardisation. The 'Refcon' range of containers are compatible to all major handling systems but where special patterns or alternative capacities etc are required, our Municipal Products team are available for Customer enquiries.

technical data

Refcon	Type	750	751	752	752a	753	754	755
Capacity	cu yd	1.25	1.25	1.25	1.25	1.25	1.25	1.25
	cu m	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Diameter	ins	36	36	36	36	36	36	36
	mm	914	914	914	914	914	914	914
Height	ins	51	51	51	51	51	51	51
	mm	1295	1295	1295	1295	1295	1295	1295
Construction		16swg	16swg	14swg	14swg	14swg	14swg	14swg
Suitable for		SD F&A	SD F&A	SD Squeeze	SD Squeeze	Glover/ Webb	Gibson/ Eagle	Dennis
		SD R/P	SD R/P	SD R/P	SD R/P	SD R/P	SD R/P	SD R/P

SD F & A: Fore and Aft Tipper SD R/P: Rack and Pinion Bulk Loader

Note: The new SD Rack and Pinion Bulk Container Loading System has been designed to accept *all* standard and elliptical containers including those of non-standard height.

This equipment is available for SD Revopak and Pakamatic machines.



Shelvoke and Drewry Limited

Icknield Way, Letchworth, Hertfordshire Telephone: Letchworth 2234 Telex: 825556

A Butterfield-Harvey Company Specifications subject to alteration without notice

Form No 641