

NEW...MONEY SAVING

TAMPO SIDE LOADER

SIX BIG MODELS
20 CUBIC YARDS TO 35 CUBIC YARDS



Engineered for Performance

The precision hydraulic system in Tampo's new side loader gives you a host of value-proved features such as a double acting multi-stage hydraulic telescoping packer cylinder . . . 85,000 pounds compaction force at 1500 PSI . . . 50 GPM gear pump . . . 1¼" spool valve with pre-set pressure relief . . . 1¼" double wire braided neoprene hydraulic hose with 6500 pounds minimum burst pressure . . . 45-gallon oil reservoir with magnetic plug and cut-off valves at inlet and outlet . . . and a 100-mesh monel reusable in-line filter. A hydraulic system designed for reliable operation for years to come.

TAMPO

SEAL-PRESS
SAN ANTONIO, TEXAS

WARRANTY:


Tampo's Seal-Press units are guaranteed to be free from defects in workmanship for a period of 1 year from

Check these features for the advantages of TAMPO engineering

DRIVE MECHANISM AND BODY

- Heavy duty power take off
- Dual outside controls with automatic throttle advance standard
- Heavy duty drive shaft and universal joints
- Sliding upper and lower side loading doors
- Deep-dished hydraulically operated or flat-split manually operated rear doors
- Complete load ejected by packer blade through rear door opening
- All welded 10 ga. steel cylindrical body with adequate hoop members for reinforcement and 3/8" steel floor
- Running boards fabricated from non-skid pattern steel with quick fold-out step on both sides of unit
- Integral running boards and rear fenders
- Fenders equipped with mud flaps

- Packer blade of welded steel design, supported on and guided by two heavy-duty cast iron graphite impregnated slide blocks
- ICC approved lights and reflectors
- Optional automatic sweep cycle clears loading area in seconds. On signal from operator, packer blade pushes refuse into body and returns to front of body automatically. Complete cycle takes less than 14 seconds, permitting quick resumption of loading.
- Dished rear door design eliminates any chance of packer blade striking rear door
- Loading openings just 15" above the frame for easier loading
- 88-inch ID body equipped with four sets of teeth to retain refuse as packer blade moves forward to permit reloading

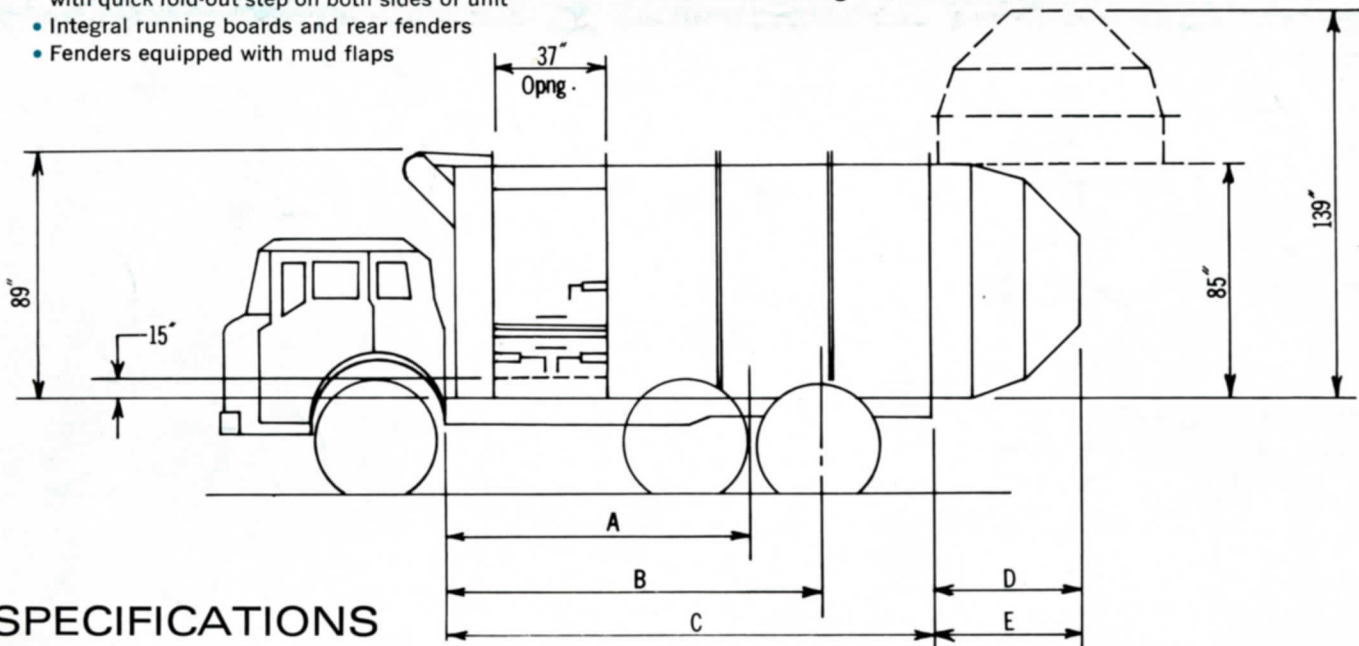

SPECIFICATIONS

MODEL	CAPACITY	A	B	B*	C	DISH D	FLAT E	WIDTH	APPROX. WEIGHT	RECOMMENDED MIN. G.V.W.
SL-20F	20 CU. YD.		102	102	175		5	94	8,900	22,000
SL-25D	25 CU. YD.		132	140	175	54		94	9,000	25,500
SL-25F	25 CU. YD.		140	148	214		5	94	10,025	26,000
SL-30D	30 CU. YD.	156			214	54		94	10,125	33,000
SL-30F	30 CU. YD.	156			253		5	94	10,950	34,000
SL-35D	35 CU. YD.	180			253	54		94	11,050	36,000

All dimensions are in inches

*Indicates conventional chassis

Tampo reserves the right under its product improvement program to change features or specifications and to furnish equipment so changed without reference to any previously published information.



MANUFACTURING CO.

1146 W. LAUREL STREET, P. O. BOX 7248
SAN ANTONIO, TEXAS 78207