




SIDE LOADING REFUSE EQUIPMENT

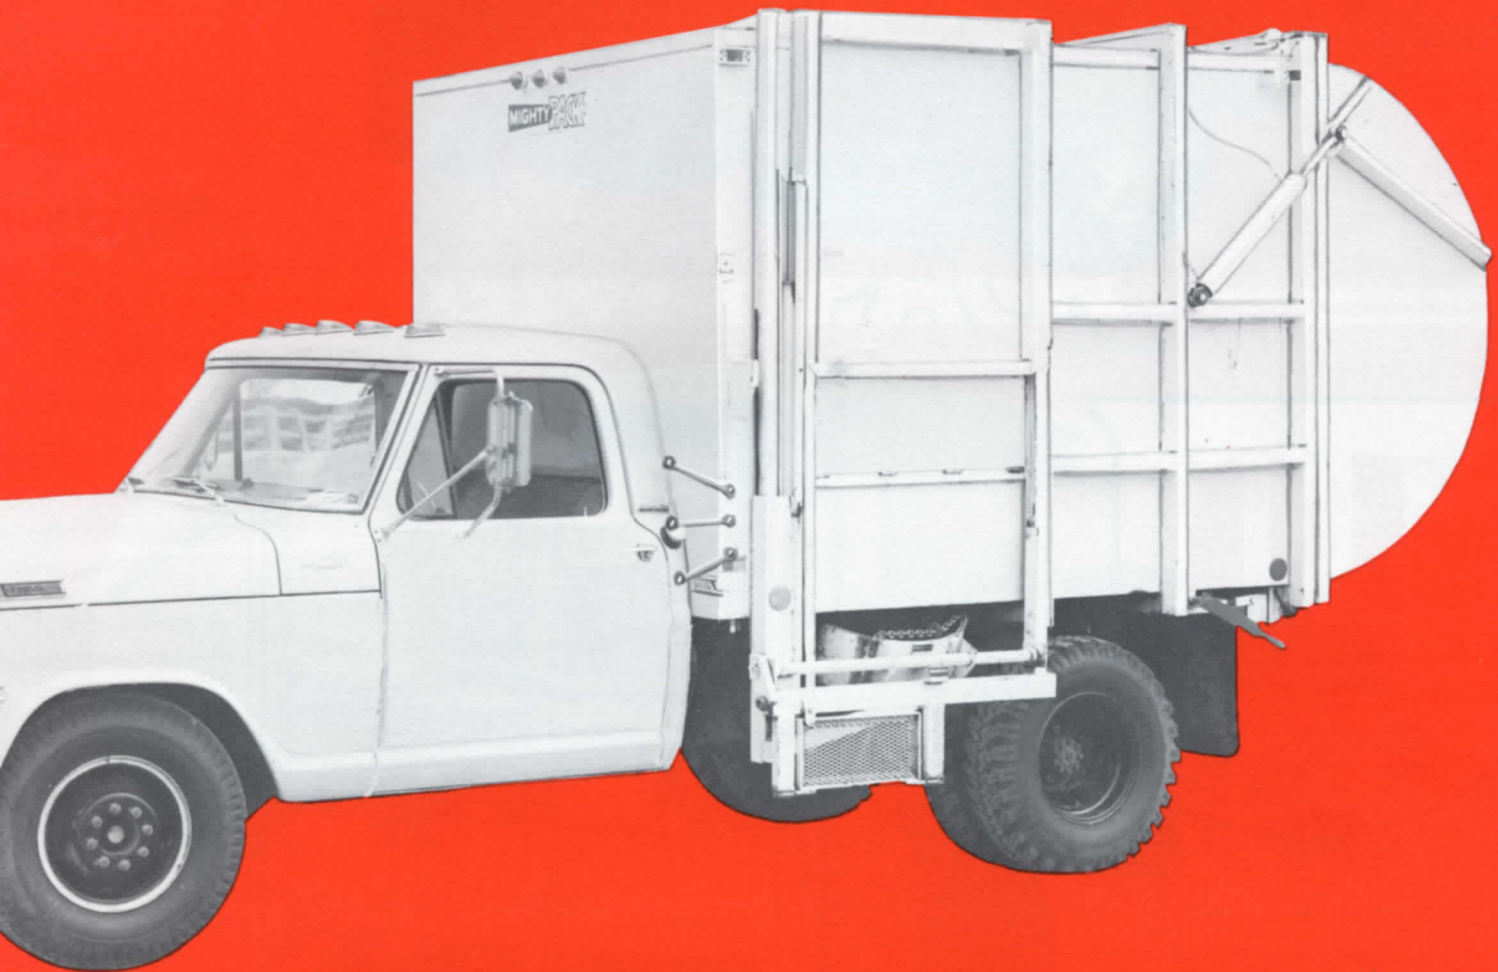

IDEAL FOR . . .

PARKS • PLAYGROUNDS • REST AREAS • TRANSFER STATIONS
SCATTERED ROUTES • SPECIAL PICK-UPS • SUPERMARKETS • MUNICIPALITIES
SHOPPING CENTERS • SCHOOL DISTRICTS • MILITARY INSTALLATIONS

7
YARD




10
YARD



TRAILER UNITS

SELF CONTAINED . . . WITH
GAS ENGINE . . . OR WET
LINE FROM TOWING
CHASSIS

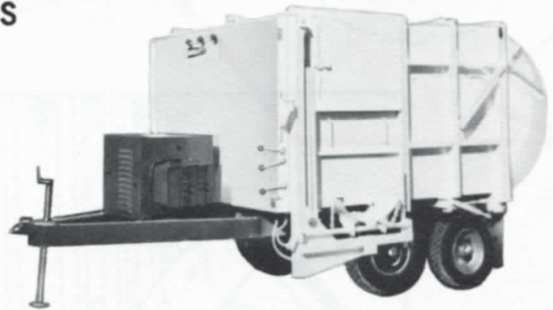

7 & 10-YARD ONLY

SAME BODY . . . SAME FEATURES as standard 7 & 10-yd. units . . . provides an economical solution for seasonal, supermarket or sporadic operations. Eliminates tying-up a chassis. Barrel lifter optional.

Pull it with a pick-up . . . dump truck . . . or any other type of towing vehicle. Powered with 10-HP gas engine . . . electric auxiliary . . . or use P.T.O. and wet line from towing unit.

Mighty Pack has...

- Two Sizes to fit Your Operations — 7 & 10 Yard.
- Full 7 & 10 Yard Packing Volume Plus 3 & 4-Yard Hopper Area Respectively
- All-Hydraulic (Fully Automatic Cycle Optional) System
- The Original Single Scissor . . . Powered With One Double Acting Cylinder
- Less Weight . . . Longer Life . . . Simple Maintenance
- Mounts on Following C. A. Chassis: (7 yd. — 60'' or 72'' C. A.) (10 yd. — 72'' or 84'' C.A.)



MIGHTY PACK[®]

BARREL LIFTER



FOR 55 GAL. DRUMS

SAFE and EASY . . . one man handles 55 gal. drums to 500 lbs.
STRAIGHT-UP . . . **COMPLETELY IN.** barrel lifter is fully powered . . . dumps automatically.
BARREL CLAMP secures drum quickly . . . spring tension level draws chain **TIGHT** . . . releases readily.
LOADING STEP on barrel lifter is optional.

WALK THRU CABS



EASY IN-OUT . . . Fold open doors both sides.
Excellent maneuverability . . . shorter wheel base . . . shorter cab . . . more weight forward for ideal weight distribution.
Check with your local chassis dealer.

WAYNE ENGINEERING CORPORATION

BOX 648, 2412 W. 27TH ST.



CEDAR FALLS, IOWA 50613




MIGHTY/PACK

has Automatic Cycling


LOADS EASY PACKS HARD

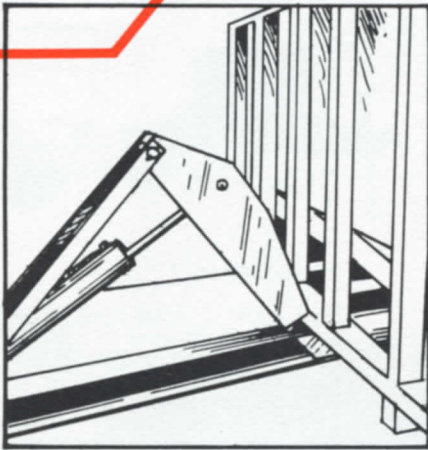

Scissor Mechanism
In Retracted Position



Blade Packing



Blade Fully Extended
Automatically returns
To Load Position

THE ORIGINAL **SINGLE SCISSOR**
PIONEERED AND PROVEN BY WAYNE

HIGH DENSITY PACKING, achieved by the **SINGLE SCISSOR**, operated by one **DOUBLE ACTING CYLINDER**.

Sturdy center H-Beam guides and supports packer blade. The most effective way to handle off-center loads common to side loaders.

The **ALL HYDRAULIC AUTO CYCLE** system operates packing blade automatically. Single lever control both sides of body.

Pressure relief system protects packing body from damage.

Packer blade tucks . . . and forces material into bottom of round tail gate . . . then circulates refuse up and around for optimum packing.

ALL HYDRAULIC . . . ONE DOUBLE ACTING CYLINDER . . . NO ELECTRIC CONTROLS

EJECTS CLEAN

JUST LIFT THE TAIL GATE and . . . eject the load.

MIGHTY PACK body remains stationary when dumping.

Refuse empties completely . . . no inside body obstructions.

Easy to sanitize . . . with steam hose or water flush.



All Wayne Products are

**FACTORY
WARRANTED**

**SOLD NATIONALLY
AND SERVICED BY
LOCAL DISTRIBUTORS**