

ABLE BODY CO.

Newark, Calif.


[415] 796-5611

FRONT END LOADERS
MANUFACTURED BY

ABLE BODY CO.

Rear Door Safety Handles

Split Barn doors are standard and include double cam locks with the Safety Handles.

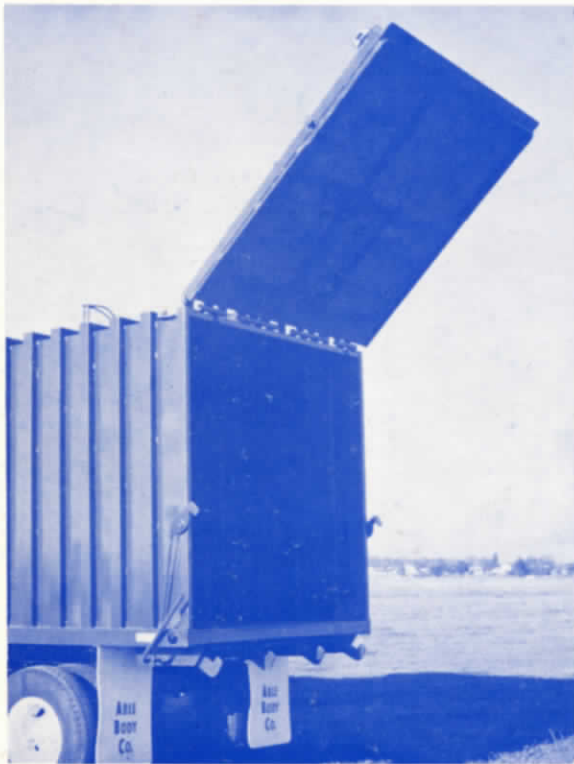

As an option, we offer a one piece Hydraulically actuated rear door with mechanical latches and water-tight seal.

Body Hoist [Partial & Top packs]

Hoist cylinders are built with extra bearing surfaces for added stability and rigidity in the landfill.

Partial Pack Body

The body sides and roof are made of 12 gauge steel. The rear portion of body floor is 1U gauge. Body posts are 1U gauge formed Channels and are welded on 12" centers. Body crossmembers are 4" structural channels.



Partial Pack Hopper

Hopper sides are one piece 3/16" steel with heavy duty 10 gauge posts. An extra large clean-out door is standard. Hopper floor is 1/4" steel and extends 120" into the body Heavy Duty 4" crossmembers on 12" centers are standard.

Hopper Cover

A Hydraulically operated top door is available. We also offer a compacting top door.



Packer Plate

Packer Plate is constructed of heavy duty tubing and 1/4" plate. The Packer Cylinders deliver 100,000 pounds of force and push the plate a full 92" into the body.

Cab Protection

A Cab Safety Bar is installed on the front of the truck to protect it and the windshield from tilted containers. The over cab canopy is Hydraulically actuated to swing up for clearance to tilt cab in case of engine failure.

Models and Capacities

We offer our Front Loaders in capacities from 30 to 45 cubic yards. We also build a full line of Full and Top Packers to fit your individual requirements.



Loader Arms

Standard Loading Arms have a lifting capacity of 7000#. 8000 pound Arms are available. Arms are mounted on the body to relieve the cross-shaft and Bushings of any undo twisting and pressure.

Hydraulic Power Packages

An air shift PTO and direct mount Commercial Pump are standard. **HOT SHIFTS** are available for Automatic Transmissions. The Hydraulic Control Valve is mounted outside the chassis for ease of maintenance. Inside and outside controls are standard. Inside Controls are Cable actuated. An Automatic Arm control on the Up cycle is another standard feature.

LET US SHOW YOU THE
ABC's
OF WASTE DISPOSAL



**MANUFACTURERS OF
RUBBISH HANDLING EQUIPMENT
INCLUDING COMMERCIAL,
RESIDENTIAL AND STATIONARY
COMPACTORS.**

ABLE BODY CO., INC.

7969 ENTERPRISE DRIVE, NEWARK, CALIF. 94560

PHONE (415) 796-5611