

OPEN-TOP ROLL-OFF CONTAINERS




E-Z PACK OPEN TOP ROLL-OFF CONTAINERS are ideal for demolition jobs — just spot a convenient container close to clean up areas. Eliminates tying up several expensive Dump Trucks, by allowing one Tilt Frame Truck to handle a number of containers. Good for incinerator ash removal, collection of noncompactible refuse, wood, stone, etc. Containers can be loaded by hand, hopper chute or front end loaders. Can also be used to accumulate scrap metal for salvage.

SPECIFICATIONS OTHER SIDE



SPECIFICATIONS

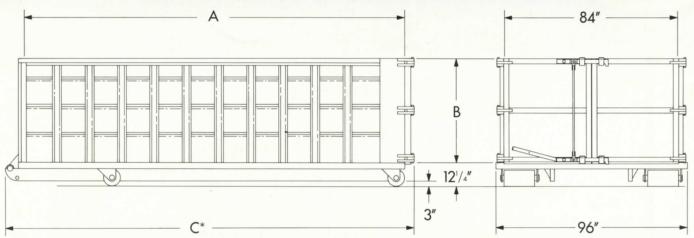

*For an approximate C dimension add 11 ins. to A dimension.

Features:

Head Sheet - 12 Ga. Hi-Ten.

Side Sheets — 12 Ga. Hi-Ten, extra large vees crimped for added strength.

Side Braces — 10 Ga. H.R.S. Steel.

Top Roll Reinforcement — 12 Ga. Hi-Ten Steel.

Floor — One piece 36" thick.

Gate — 12 Ga. Hi-Ten - Barn Door Type,

Gate braces 10 Ga. H.R.S.

Gate latching mechanism 3/4" H.R.S. Bars.

Gate Hinge drop forge 17" long, eight hinges to a side.

Crossmembers — 3" Channel on 24" Centers.

Longitudinal — 6" 13 lb. Channel.

Crossmembers gussetted to longitudinal.

Rollers — Front Rollers 8" Diam. x 43/4" Long.

70,000 PSI Tubing.

Rear Rollers 8" Diam. x 143/4" Long.

70,000 PSI tubing.

Anchor Plate — Supporting hook for connecting cable is 5%" plate.

Model	Capacity	(A) Inside Length	(B) Inside Height
OT-16/15	15	16 ft.	44 in.
OT-16/20	20	16 ft.	59 in.
OT-16/25	25	16 ft.	74 in.
OT-18/15	15	18 ft.	39 in.
OT-18/20	20	18 ft.	53 in.
OT-18/25	25	18 ft.	65 in.
OT-18/30	30	18 ft.	78 in.
OT-20/15	15	20 ft.	35 in.
OT-20/20	20	20 ft.	47 in.
OT-20/25	25	20 ft.	59 in.
OT-20/30	30	20 ft.	70 in.
OT-20/35	35	20 ft.	81 in.
OT-20/40	40	20 ft.	93 in.
OT-22/15	15	22 ft.	32 in.
OT-22/20	20	22 ft.	44 in.
OT-22/25	25	22 ft.	53 in.
OT-22/30	30	22 ft.	63 in.
OT-22/35	35	22 ft.	74 in.
OT-22/40	40	22 ft.	85 in.

E-Z PACK COMPANY

A DIVISION OF HERCULES GALION PRODUCTS, INC. GALION, OHIO 44833 U.S.A.