

Norba Refuse Collection Vehicle KI-8

Norba AB



Print No. 154

Jan. -77

Supersedes No.-

Manual and/or hydraulic loading.
Large container hoist.
Static hopper. Packer plate compression.
Ejection discharge.



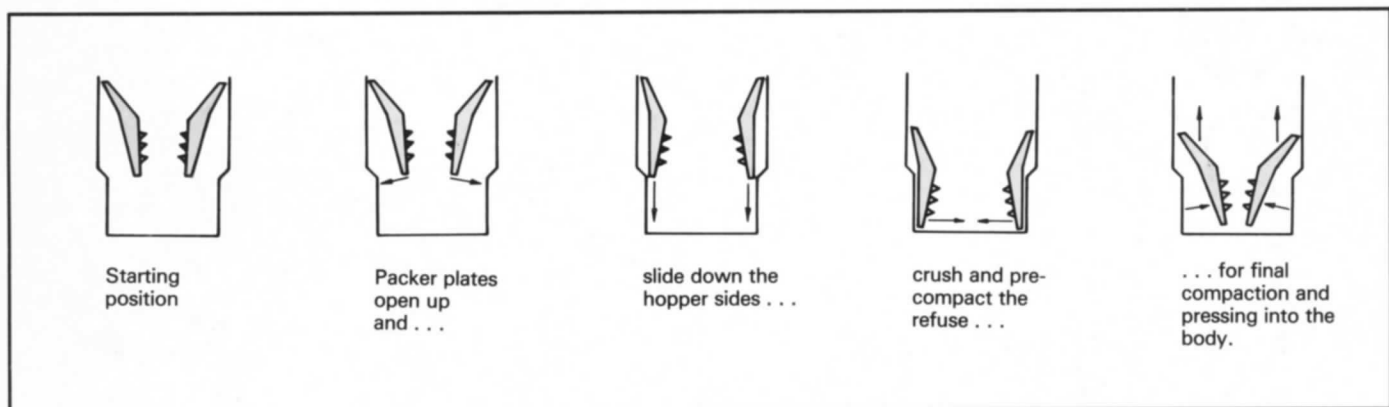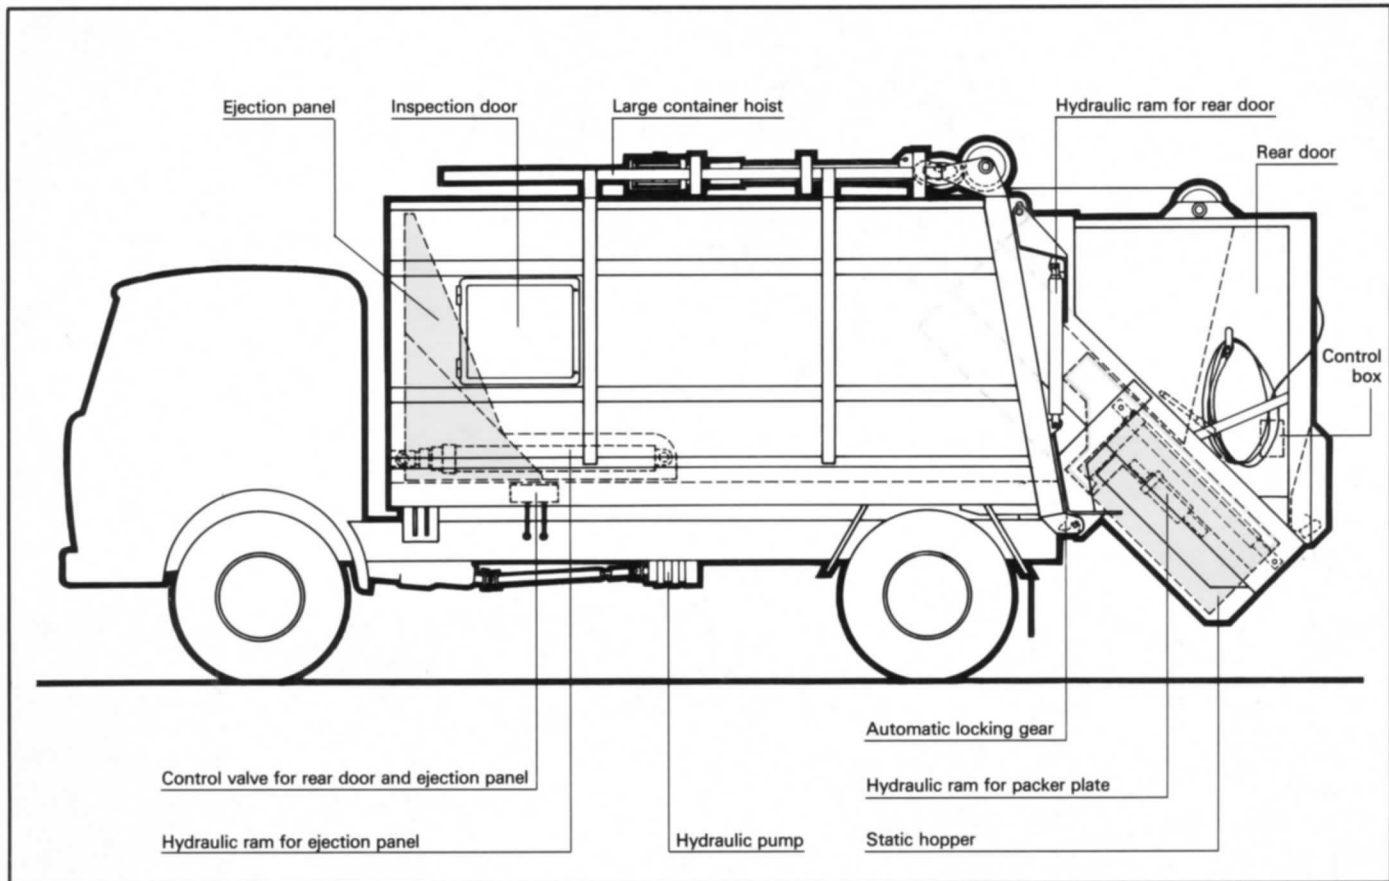

Range of Application

The KI-8 is an all-purpose vehicle suitable for commercial, domestic and certain industrial refuse.

Sizes

The bodies are manufactured in the standard sizes 14.0, 14.5, 16.5 and 19 m³ (air-volume).

Compression

The packer plates ("jaws") operate on an intermittent cycle, crush and precompact the refuse before it is pressed into the body. The volume of refuse is normally reduced by 3-5:1.

Hydraulic pressure

Working cycle: 100—170 bar

Ejection panel: 80 bar

Other hydraulic system: 180—190 bar

Large container hoist working cycle

Up: approx. 10 sec.

Down: approx. 12 sec.

Capacity: 2.500 kg

Hopper size

1.6 m³

Discharge

The rear door is opened hydraulically and the ejection panel discharges the load in about one minute. The rear door is automatically locked to the body.

Fittings

The vehicle can be delivered with a bin or container hoist in combination with large container hoist.

Bin/container hoist working cycle: 8—10 sec.

The manufacturer retains the right to alter design and equipment without previous notice.

NORBA

Norba AB P.O.Box 7 S-384 01 Blomstermåla, Sweden Tel. 46 499-206 50